


Set Match

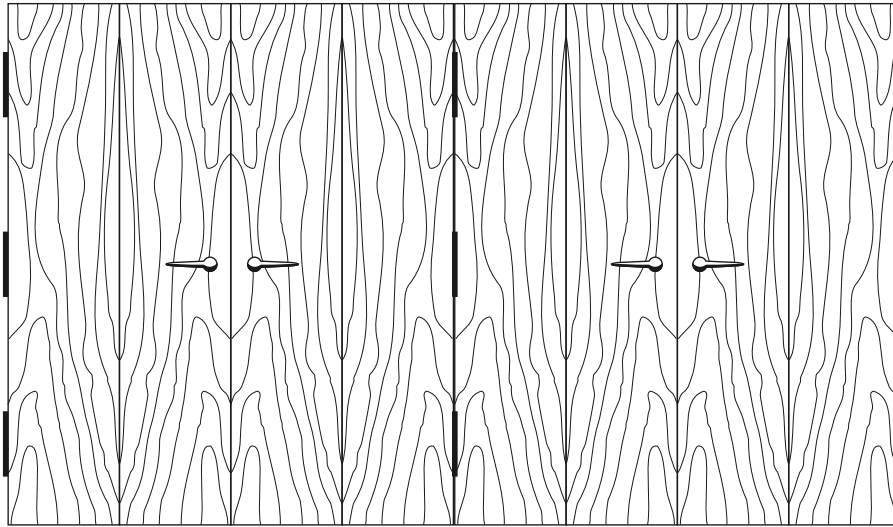


Door Set Match - Figure 1300-12

Doors hung in adjacent sets may be (and in some Grades, must be) specified as set matched where appropriate.

Note to specifiers: The illustration shows book-matched, center balance matched faces. The standards do not require this condition. A review of the previous few pages and careful specification will avoid misunderstandings.

1300-G-15


Doors with Transoms

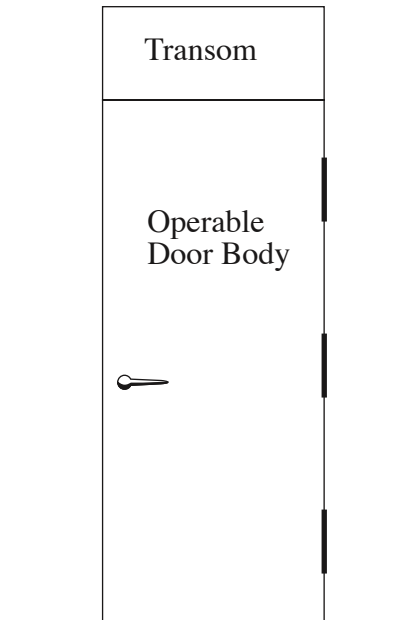

Door Transoms - Figure 1300-13

The use of the transom increases the apparent height of the wood door and often enhances the appearance of the opening. The type of match should be specified, and a slight misalignment of veneer grain may occur between the transom and the door. Industry practice allows a variation in grain alignment from side to side of $\frac{3}{8}$ " on a single door, and $\frac{1}{2}$ " on pairs of doors with a single transom. Tighter tolerances must be specified as a part of Premium Grade doors.

Continuous Match

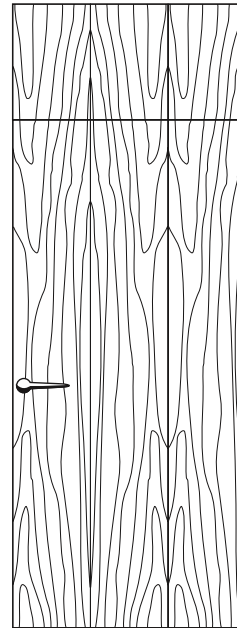

Continuous Match - Figure 1300-14

Provides optimum veneer utilization as each single piece of veneer extends from the top of the transom to the bottom of the door. Available veneer length in the species may limit this option.