


STANDARD FLUSH HOLLOW CORE DOOR

NAUF AVAILABLE

Hollow core door recommended for interior use. Quality craftsmanship offers durability and economy.
Meets or exceeds the following industry standards:
ANDI/WDMA I.S. 1A; W.I. Section 12 and A.W.S. Grade Custom Edition II 2014.

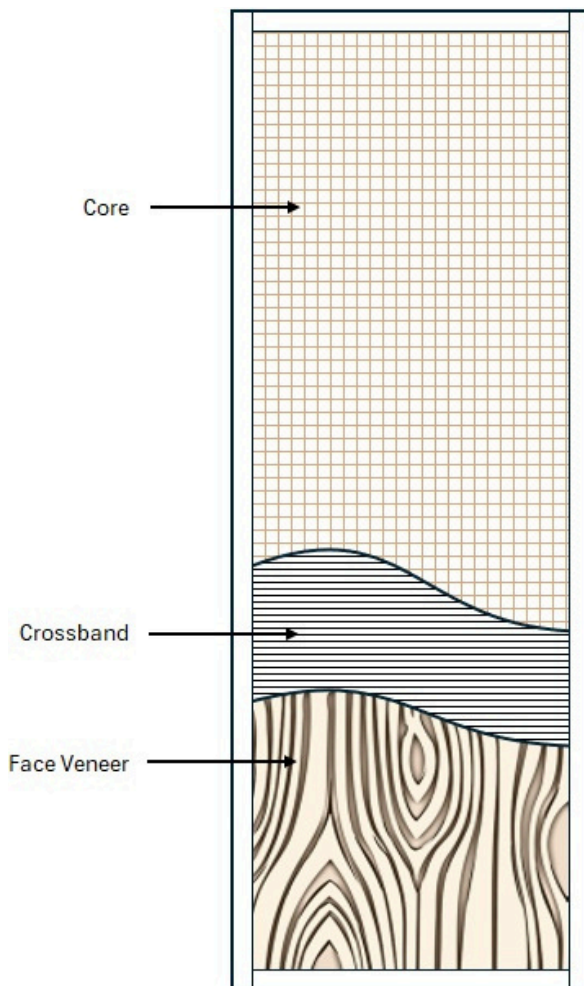

PRODUCT FEATURES AND SPECIFICATIONS

Maximum Size: 4'0" x 8'0"

Thickness: 1-3/8" or 1-3/4"

Core: Expanded corrugated kraft fiber.

Stiles and Rails*: 1-1/8" minimum Fingerjoint; Fiber. (Fiber not available on 1-3/4" doors.)

Lock Blocks: 2-5/8" x 16" softwood; Total area including stile 3-5/8" x 16"

Faces: Available in Birch, Red Oak, Legatex, Raw or Primed Hardboard, and Luan. Please call for other species available.

Adhesives: Type-II interior.

Lites and Louvers: Please call Customer Service for options.

Prefitting:** May be factory machined for hardware as specified.

Warranty: 1 Year Residential Door warranty. See Haley warranty at [Haley Bros website](http://www.HaleyBros.com) for specific warranty details.

Short Form Specification: "Doors shall be Haley Standard Hollow Core Doors manufactured according to specifications in Haley catalog."

*Stile and rail frame dimensions may vary due to machining specifications